

Pneumatische Quetschventile Typ VM

Muffenausführung DN10-50

Air operated Pinch Valves type VM

Socket type DN10-50



▲ Die optimale Armaturenlösung für abrasive, korrosive und fasrige Produkte wie z.B. Granulate, Pulver, Suspensionen, Schlämme, Stäube etc.

▲ The ideal valve solution for abrasive, corrosive and fibrous products like granules, powders, suspensions, sludge/slurries, dust and so on.

Industriebereiche:

- Weinindustrie
- Pharmaindustrie
- Lebensmittelindustrie
- Getränkeindustrie
- Chemische Industrie
- Offshore Industrie
- und viele mehr

Industrial areas:

- Wine Industry
- Pharmaceutical Industry
- Food Industry
- Beverage Industry
- Chemical Industry
- Offshore Industry
- and many more

Pneutrol International Limited


UK Office
5 Caulside Drive, Antrim, BT41 2DU
United Kingdom
TEL: +44 (0) 28 9448 1800
www.concretespares.co.uk

sales@pneutrol.com

European Office
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
Ireland
TEL: +353 (0) 1 4373653
www.concretespares.ie

Pneumatische Quetschventile Typ VM

Air operated Pinch Valves type VM

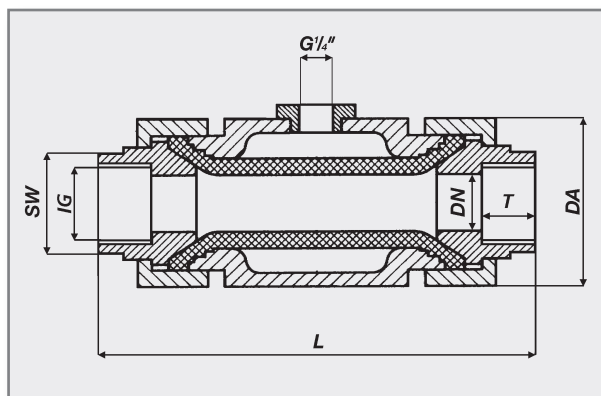

- Freier Produktdurchfluss
- Optimale Abdichtung
- Minimaler Reibungswiderstand
- Kein Verstopfen
- Geringes Gewicht

- Free passage
- Optimum tightness
- Low resistance
- No plugging
- Low weight

DN (mm)	IG (inch)	T (mm)	SW (mm)	L (mm)	DA (mm)	PS max. (bar)
10	G $\frac{3}{8}$ "	16	24	122	46	6
15	G $\frac{1}{2}$ "	18	36	134	60	6
20	G $\frac{3}{4}$ "	19	36	140	60	6
25	G1"	20	46	145	75	6
32	G1 $\frac{1}{4}$ "	25	52	170	85	6
40	G1 $\frac{1}{2}$ "	26	65	200	100	6
50	G2"	24	80	213	120	6

Werkstoffe / Materialien:

Gehäuse:

PVC

Aluminium + Edelstahl auf Anfrage

Muffe:

PVC,

Edelstahl, POM auf Anfrage

Manschetten:

Naturgummi (NR) abriebsfest, NR Lebensmittel, NBR, NBR Lebensmittel, Silikon, EPDM, EPDM Lebensmittel, FPM, CR, CSM

Min. Differenzdruck zum Schließen des Ventils:
2-4 bar (variiert je nach Nennweite/Elastomer)

Quetschventilzubehör finden Sie in unserem Datenblatt
"Z01"-Zubehör für Armaturen.

Materials:

Valve body:

PVC

Aluminium, stainless steel upon request

Socket:

PVC,

Stainless steel, POM upon request.

Sleeves:

Natural rubber (NR) anti-abrasive, NR food quality, NBR, NBR food, EPDM, EPDM food, silicone, FPM, CR, CSM

Min. differential pressure to close the valve:
2-4 bar (varies depending on diameter/sleeve)

Pinch Valve Accessories to be found on our data sheet
"Z01"-Pinch Valve Accessories.

Pneutrol International Limited

UK Office
5 Caulside Drive, Antrim, BT41 2DU
United Kingdom
TEL: +44 (0) 28 9448 1800
www.concretespares.co.uk

sales@pneutrol.com

European Office
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
Ireland
TEL: +353 (0) 1 4373653
www.concretespares.ie