



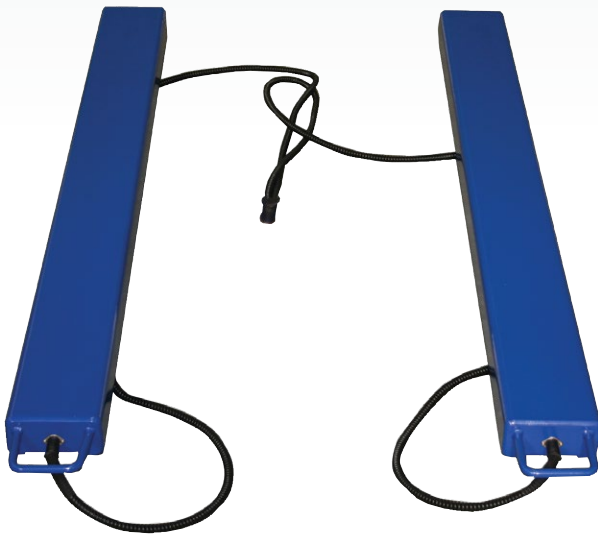

AELP pallet beams provide an affordable solution to weigh oversized or bulky items. Equipped with rugged built-in wheels and handles, AELP pallet beams are easy to set up and move. The low-profile beams permit easy accessibility to simplify loading, weighing and unloading. AELP comes with a five-meter shielded cable, allowing the indicator and beams to be positioned as needed. Four OIML-approved load cells provide precise, consistent measurements. The AELP pairs well with Adam's GK or AE 402 indicators.

Low-profile beams facilitate safe, secure weighing for loaded pallets

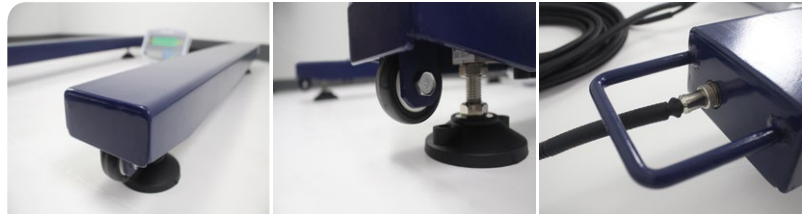

Features

- Low-profile beams allow easy pallet weighing using pallet trucks
- Approximately five-meter/15-foot shielded cable
- Heavy-duty rubber feet ensure stability of unit
- Integrated wheels permit easy movement
- Can be used with any Adam indicators
- Two beams per set

Applications

- Weighing
- Parts counting
- Percentage weighing
- Checkweighing
- Checkcounting
- Dynamic / animal weighing

Compatible Indicators



AE 402 Indicator



GK Indicator

About ADAM:

For more than 40 years, professionals worldwide have relied on Adam Equipment for an extensive selection of dependable and affordable weighing equipment. Adam provides the right balance of speed, performance and value.

PNEUTROL INTERNATIONAL LIMITED

sales@pneutrol.com

Model	AELP 1000	AELP 2000	AELP 3000	AELP 1000 [GK]	AELP 2000 [GK]	AELP 3000 [GK]
Capacity	1000kg	2000kg	3000kg	1000kg	2000kg	3000kg
Readability	0.2kg	0.5kg	1kg	0.2kg	0.5kg	1kg
Loadcell [Excitation Voltage]	5 - 10 VAC / DC					
Loadcells [num]	4					
Pan Size	120x1330mm					
Weighing Units	N/A			kg		
Stabilisation Time (sec)	2	3		2	2	
Interface	N/A			RS-232		
Calibration	External calibration					
Display	N/A			Backlit LCD with 20mm -high digits		
Power Supply	N/A			Mains power cord / Internal rechargeable battery		
Operating Temperature	-10° to 40°C					
Housing	Mild steel base					
Cable Length	5M					
Overall Dim.	120x1330x85mm (wxdxh)					
Net Weight	34kg			36kg		

Accessories

Item number	Description
3052010526.....	In-use cover - GK Indicator Only
3102311619.....	In-use cover - AE402 Indicator Only
1120011156.....	ATP thermal printer
3126011263.....	ATP thermal printer paper
3126011281.....	ATP thermal printer paper (pack of 10)
3074010266.....	RS-232 cable (null-modem) - GK Indicator Only
700400103.....	RS-232 cable - AE402 Indicator Only
3074010507.....	RS-232 to USB adapter (must order corresponding RS-232 cable)
600002028.....	Adam DU data collection program
700660289.....	Calibration certificate

Key Accessories



ATP thermal printer

Easy-to-use features combined with quick set-up equals a truly versatile thermal printer. A single push-button feed key and three easy-to-read LED indicators make operation simple.



AdamDU data collection program

Adam DU software connects a balance to the laboratory network, helping to achieve seamless data collection, transfer and analysis. DU features an easy-to-use interface with a main command window, allowing users to quickly collect information from up to eight Adam balances simultaneously using RS-232 or USB connections.