


Compact

Range of Weighing Assemblies

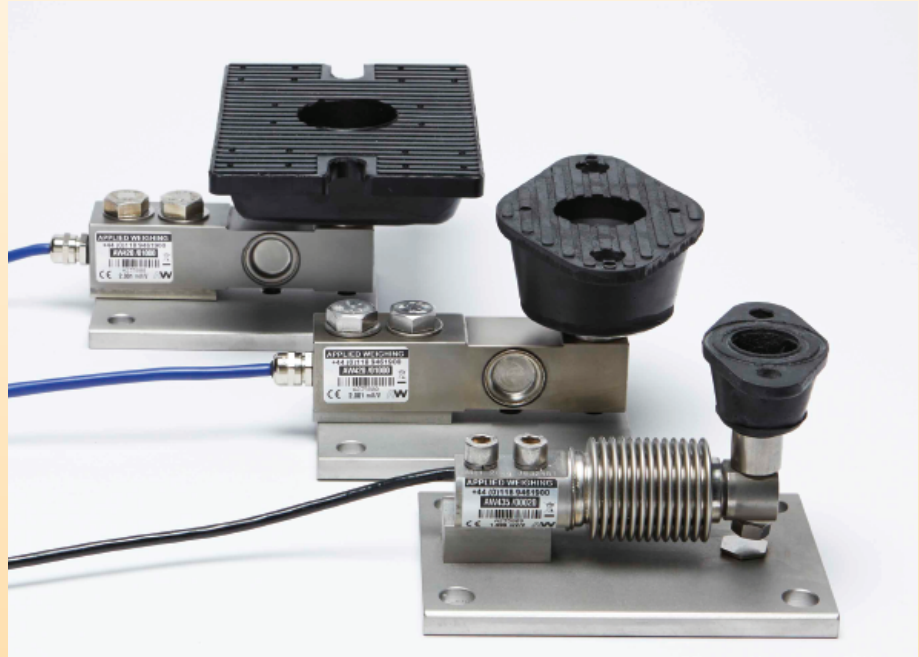

Features

- 20kg to 2,000kg capacities.
- For Hoppers, Tanks and Vessel weighing.
- Robust hygienic design for harsh industrial applications.
- Inbuilt strength 150% maximum overload.
- Anit-vibration rubber load pad.
- Designed and manufactured in the UK with a 5 year warranty.

Options

- ATEX for Zone 0, 1, 2, 20, 21 and 22 hazardous areas.
- OIML C3 approval.
- Digital version with RS485 ASCII, Modbus, CAN and CANopen outputs.
- High temperature version up to 160°C.
- Range of industrial instrumentation and weight controllers.

Description

The Compact range of tank and vessel weighing assemblies are designed for harsh industrial weighing applications. The assembly ensures precise, reliable and safe operation, with option for use in ATEX Hazardous Areas.

ENGINEERING SPECIFICATIONS

ULTRA COMPACT RANGE - STAINLESS STEEL LOAD CELL AND COMPONENTS WITH RUBBER MOUNT

Specifications

Full Scale Output: 2.00mV/V Nominal
 Creep (in 20 minutes) 0.02% maximum
 Non-Linearity: 0.03% maximum
 Hysteresis: 0.05% maximum
 Non-Repeatability: 0.02% maximum
 Compensated temperature range:
 -10°C to +40°C
 Operating temperature range:
 -40°C to +80°C (-35°C to +60°C for ATEX)
 Load cell material: Stainless steel 17-4 PH
 Assembly: 304 stainless steel
 Protection: up to IP68 (ATEX IP66)

For ATEX Category 1 - II 1GD

For ordering suffix the part number with 'X' i.e.
 AW337/0200X (see certificate BAS99ATEX2067)

For ATEX Category 3 - II 3GD


For ordering suffix the part number with 'XD' i.e.
 AW337/0200XD (see certificate Baseefa09ATEX0147X)

Safe Overload: 150%
 Insulation Resistance: 2000 MΩ
 Supply Voltage: 5-12 V (DC or AC)
 Max Voltage: 15V
 Zero Balance: ±1% F. S.


PART NUMBERS 250kg - 2,000kg

Assembly-Weighing Capacity	Compact stainless steel assembly & Ultra loadcell Part Number:	Weighing Capacity	Ultra loadcell only Part Number:	Ultra Compact only to 500kg (no cell) AW335/00250
250 kg	AW337/00250	250 kg	AW420/00250	
500 kg	AW337/00500	500 kg	AW420/00500	
1000 kg	AW337/01000	1,000 kg	AW420/01000	
1500 kg	AW337/01500	1,500 kg	AW420/01500	
2000 kg	AW337/02000	2,000 kg	AW420/02000	Ultra Compact only to 2,000kg (no cell) AW335/02000

1,000kg to 2,000kg

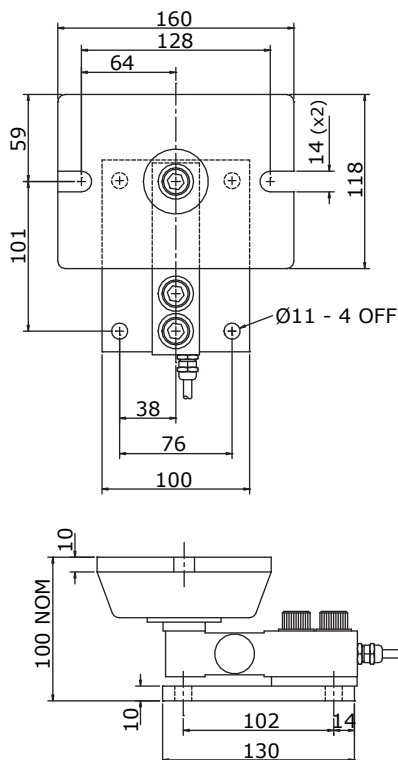

250kg & 500kg

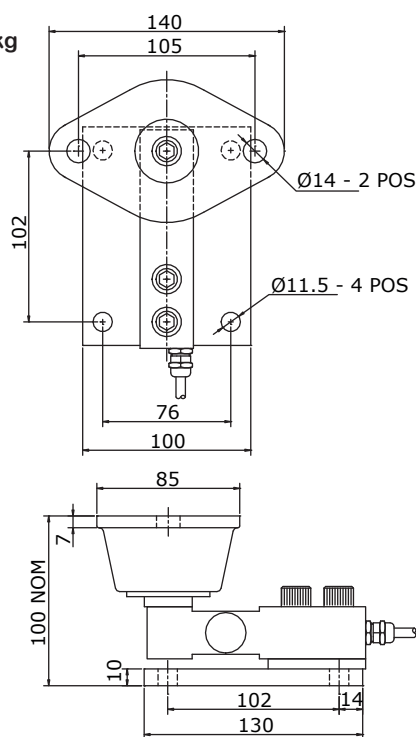

Colour Code:

Positive Excitation - RED
 Negative Excitation - BLUE
 Positive Signal - GREEN
 Negative Signal - YELLOW

Cable: 6 metres
 4 core screened

All dimensions in mm

Refer to installation documents before use

Pneutrol International Limited

sales@pneutrol.com



UK Office
 5 Caulside Drive, Antrim, BT41 2DU
 United Kingdom
 TEL: +44 (0) 28 9448 1800
 www.concretespares.co.uk

European Office
 Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
 Ireland
 TEL: +353 (0) 1 4373653
 www.concretespares.ie

ENGINEERING SPECIFICATIONS

SHEAR BEAM COMPACT RANGE - TOOL STEEL LOAD CELL WITH STAINLESS STEEL ASSEMBLY


Specifications

Full Scale Output:	3.00mV/V Nominal	Load cell material:	Plated EN24T steel
Creep (in 20 minutes)	0.02% maximum	Assembly:	304 stainless steel
Non-Linearity:	0.03% maximum	Protection:	up to IP66 (ATEX IP66)
Hysteresis:	0.05% maximum	Safe Overload:	150%
Non-Repeatability:	0.02% maximum	Insulation Resistance:	2000 MΩ
Compensated temperature range:		Zero Balance:	±1% F. S.
-10°C to +40°C		Supply Voltage:	5-12 V (DC or AC)
Operating temperature range:		Max Voltage:	15V
-40°C to +80°C			


PART NUMBERS 500kg - 2,000kg

Assembly-Weighing Capacity	Compact stainless steel assembly & shear beam loadcell:	Weighing Capacity	Shear beam loadcell only part Number:	Compact only to 500kg (no cell) AW335/00250
500 kg	AW330/00500	500 kg	AW410/00500	
1000 kg	AW330/01000	1,000 kg	AW410/01000	
1500 kg	AW330/01500	1,500 kg	AW410/01500	
2000 kg	AW330/02000	2,000 kg	AW410/02000	Compact only to 2,000kg (no cell) AW335/02000

1,000kg to 2,000kg

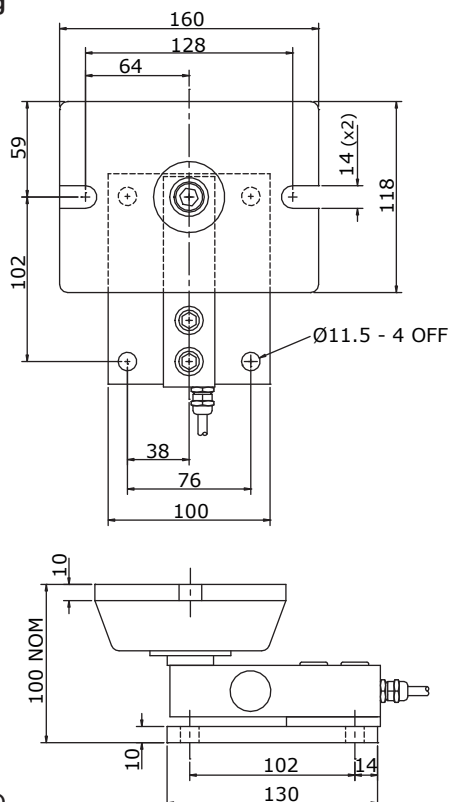

500kg

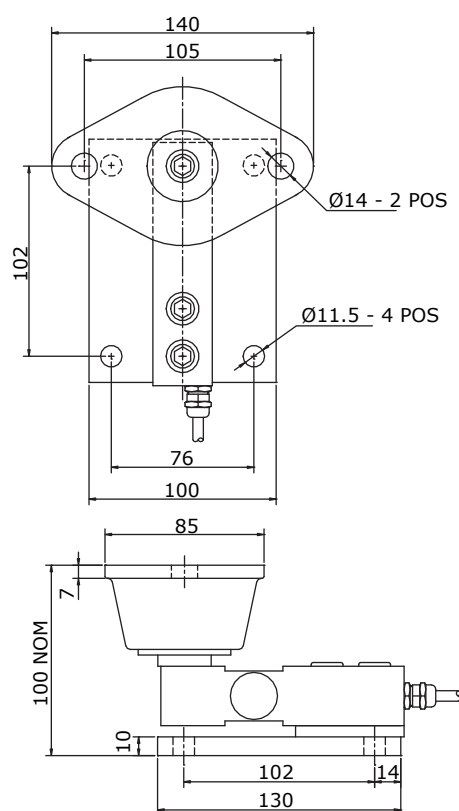

Colour Code:

Positive Excitation - RED
Negative Excitation - BLUE
Positive Signal - GREEN
Negative Signal - YELLOW

Cable: 6 metres
4 core screened

All dimensions in mm

Refer to installation documents before use

Pneutrol International Limited

sales@pneutrol.com



UK Office
5 Caulside Drive, Antrim, BT41 2DU
United Kingdom
TEL: +44 (0) 28 9448 1800
www.concretespares.co.uk

European Office
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
Ireland
TEL: +353 (0) 1 4373653
www.concretespares.ie

ENGINEERING SPECIFICATIONS

CHALLENGER COMPACT RANGE - STAINLESS STEEL LOAD CELL WITH STAINLESS STEEL ASSEMBLY

Specifications

Full Scale Output: 2.00mV/V Nominal
 Creep (in 20 minutes) 0.02% maximum
 Non-Linearity: 0.03% maximum
 Hysteresis: 0.05% maximum
 Non-Repeatability: 0.02% maximum
 Compensated temperature range:
 -10°C to +40°C
 Operating temperature range:
 -40°C to +80°C (-35°C to +60°C for ATEX)
 Load cell material: Stainless steel 17-4 PH
 Assembly: 304 stainless steel

For ATEX Category 1 - II 1G (GAS ONLY)


For ordering suffix the part number with 'X' i.e.
 AW336/0002X (see certificate BAS99ATEX2067)

Protection: up to IP65
 Safe Overload: 150%
 Insulation Resistance: 2000 MΩ
 Zero Balance: ±1% F. S.
 Supply Voltage: 5-12 V (DC or AC)
 Max Voltage: 15V

PART NUMBERS 20kg - 200kg

Assembly-Weighing Capacity	Compact assembly & Challenger loadcell part Number:	Weighing Capacity	Challenger loadcell only Part Number:	Compact only to 20kg (no cell) AW335/00020
20 kg	AW336/00020	20 kg	AW430/00020	
50 kg	AW336/00050	50 kg	AW430/00050	
100 kg	AW336/00100	100 kg	AW430/00100	
150 kg	AW336/00150	150 kg	AW430/00150	
200 kg	AW336/00200	200 kg	AW430/00200	Compact only to 200kg (no cell) AW335/00200

50kg to 200kg

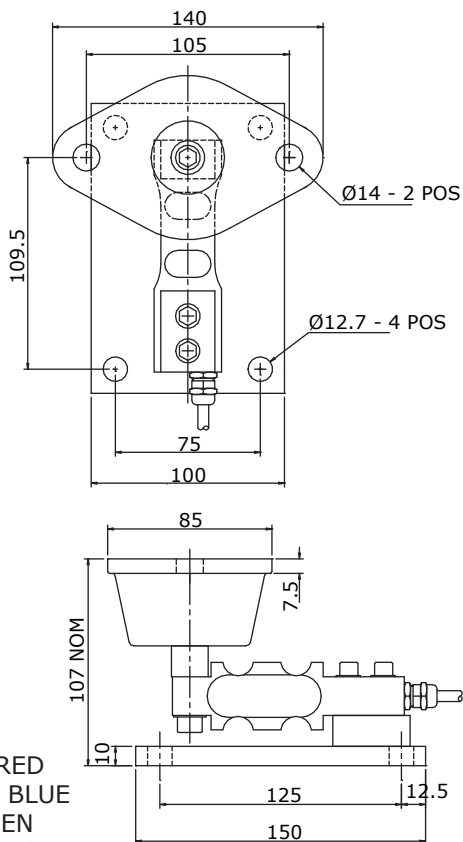


Colour Code:

Positive Excitation - RED
 Negative Excitation - BLUE
 Positive Signal - GREEN
 Negative Signal - YELLOW

Cable: 6 metres
 4 core screened

20kg

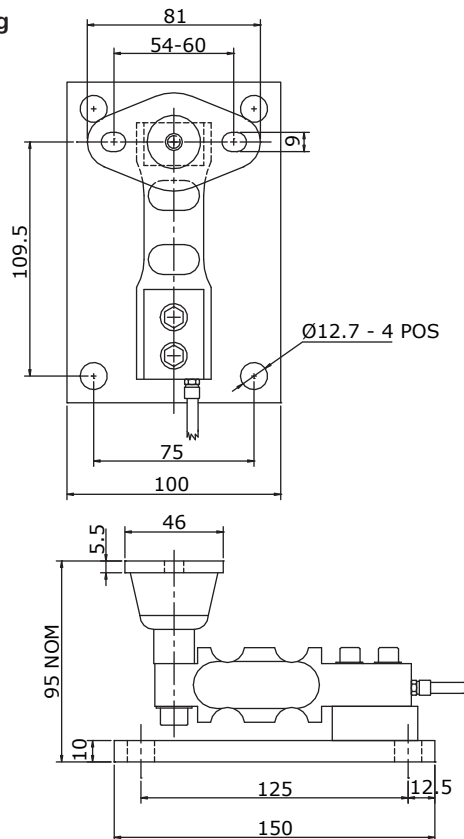

All dimensions in mm
Refer to installation documents before use

Pneutrol International Limited

sales@pneutrol.com



UK Office
 5 Caulside Drive, Antrim, BT41 2DU
 United Kingdom
 TEL: +44 (0) 28 9448 1800
 www.concretespares.co.uk

European Office
 Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
 Ireland
 TEL: +353 (0) 1 4373653
 www.concretespares.ie

ENGINEERING SPECIFICATIONS

CHALLENGER PRO COMPACT - STAINLESS STEEL LOAD CELL WITH STAINLESS STEEL ASSEMBLY

Specifications

Full Scale Output: 2.00mV/V Nominal
 Creep (in 20 minutes) 0.02% maximum
 Non-Linearity: 0.03% maximum
 Hysteresis: 0.05% maximum
 Non-Repeatability: 0.02% maximum
 Compensated temperature range:
 -10°C to +40°C
 Operating temperature range:
 -40°C to +80°C (-35°C to +60° for ATEX)
 Load cell material: Stainless steel 17-4 PH
 Assembly: 304 stainless steel
 Protection: up to IP68 (ATEX IP66)

For ATEX Category 1 - II 1GD

For ordering suffix the part number with 'X' i.e.
 AW339/0020X (see certificate BAS99ATEX2067)

For ATEX Category 3 - II 3GD


For ordering suffix the part number with 'XD' i.e.
 AW339/0020XD (see certificate Baseefa09ATEX0147X)

Safe Overload: 150%
 Insulation Resistance: 2000 MΩ
 Zero Balance: ±1% F. S.
 Supply Voltage: 5-12 V (DC or AC)
 Max Voltage: 15V


PART NUMBERS 10kg - 200kg

Assembly-Weighing Capacity	Compact assembly & Challenger Pro loadcell part Number:	Weighing Capacity	Challenger Pro loadcell only Part Number:	Compact only to 20kg (no cell) AW335/00020
10 kg	AW339/00010	10 kg	AW435/00010	
20 kg	AW339/00020	20 kg	AW435/00020	
50 kg	AW339/00050	50 kg	AW435/00050	
100 kg	AW339/00100	100 kg	AW435/00100	
200 kg	AW339/00200	200 kg	AW435/00200	
				Compact only to 200kg (no cell) AW335/00200

50kg to 200kg

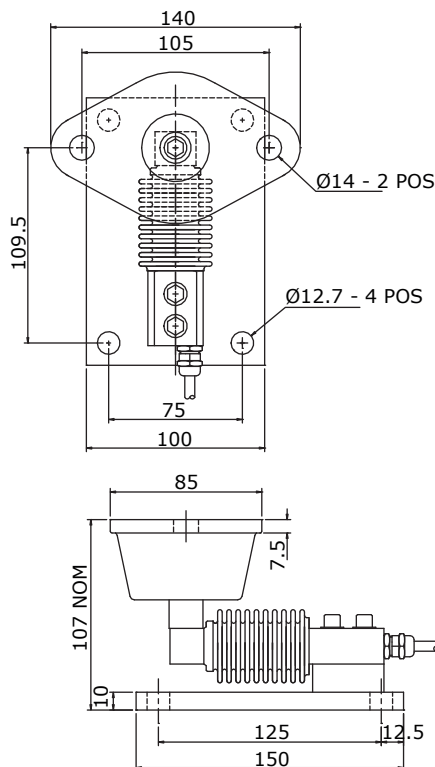

20kg

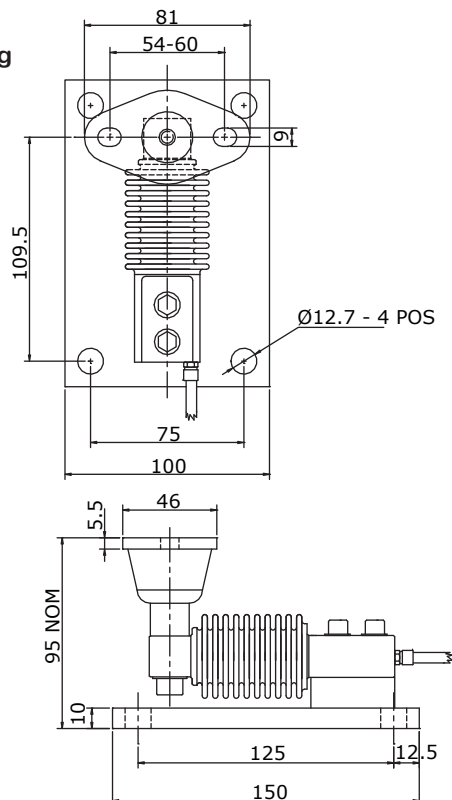

Colour Code:

Positive Excitation - RED
 Negative Excitation - BLUE
 Positive Signal - GREEN
 Negative Signal - YELLOW

Cable: 6 metres
 4 core screened

All dimensions in mm

Refer to installation documents before use

Pneutrol International Limited

sales@pneutrol.com



UK Office
 5 Caulside Drive, Antrim, BT41 2DU
 United Kingdom
 TEL: +44 (0) 28 9448 1800
 www.concretespares.co.uk

European Office
 Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
 Ireland
 TEL: +353 (0) 1 4373653
 www.concretespares.ie