

FLIP CAP

Protective Cap User Manual - Original Language Version



FLIP-S

The Castell protective cap is used to prevent dust ingress into the Castell F (Figure) style lock portion. In addition, the cap can be fitted with a padlock to prevent lock operation during maintenance.

Usage

The Castell FLIP-S is padlockable protective cap is used to prevent dust ingress getting into the Castell F (Figure) style lock portion.



Technical Data

Temperature rating	Minimum: -40°C [-40°F] ice free for Q & F Type
	Maximum: 107°C [224,6°F] for Q Type/140°C [284°F] for F Type
Weight	0,1 kg
Material	Stainless steel/brass /nickel plated/chrome plated/nylon coated

No hazardous substances were used in the manufacture of this product. The product can be disposed of in standard waste.

EC-Declaration

We, the manufacturers, declare that the components, detailed herein and placed on the market, comply with all the essential health and safety requirements applying to them.

Empowered signatory:

Mr T.C. Whelan
Managing Director

A handwritten signature in black ink, appearing to read 'T.C. Whelan'.



Pneutrol International Limited

UK Office
5 Caulside Drive, Antrim, BT41 2DU
United Kingdom
TEL: +44 (0) 28 9448 1800
www.concretespares.co.uk

sales@pneutrol.com


European Office
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
Ireland
TEL: +353 (0) 1 4373653
www.concretespares.ie

FLIP CAP

Protective Cap
User Manual - Original Language Version

Drawing

FLIP-S

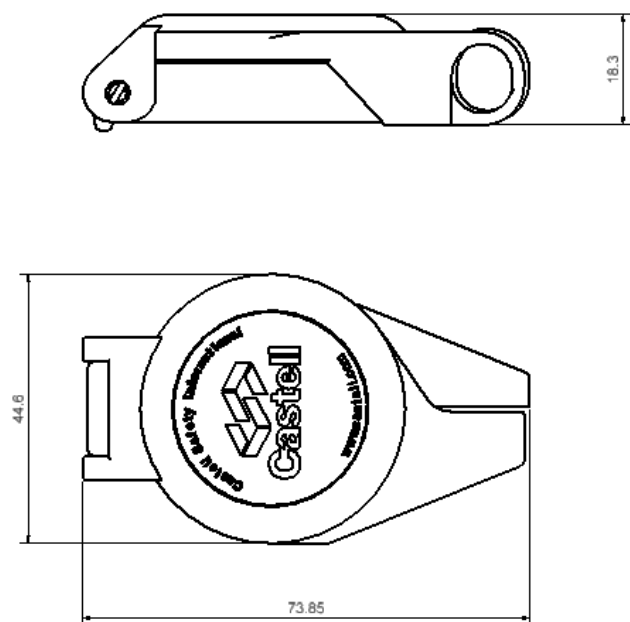

Order Information

Part Number FLIP - S

Contact Information



Pneutrol International Limited
UK Office
5 Caulside Drive, Antrim, BT41 2DU
United Kingdom
TEL: +44 (0) 28 9448 1800
www.concretespares.co.uk

sales@pneutrol.com
European Office
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95
Ireland
TEL: +353 (0) 1 4373653
www.concretespares.ie