



Digital Microwave Moisture Sensor for  
Bins, Silos and Conveyors

# Hydro-Probe II



THE ORIGINAL – THE LEADER – THE BEST

Pneutrol International Limited

UK Office  
5 Caulside Drive, Antrim, BT41 2DU  
United Kingdom  
TEL: +44 (0) 28 9448 1800  
[www.concretespares.co.uk](http://www.concretespares.co.uk)

[sales@pneutrol.com](mailto:sales@pneutrol.com)

European Office  
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 VW95  
Ireland  
TEL: +353 (0) 1 4373653  
[www.concretespares.ie](http://www.concretespares.ie)

# Hydro-Probe II

## Digital microwave moisture sensor for bins, silos and conveyors

*The Hydro-Probe II is a rugged, microwave moisture measurement sensor designed to be installed in bins, silos and conveyors in process control environments.*

*Measuring at 25 times per second and with on-board functionality such as signal processing and averaging, the Hydro-Probe II accurately measures the moisture content of material as it flows over the ceramic faceplate. Remote configuration, calibration, diagnostics and firmware upgrades are simple using Hydronix Hydro-Com software. The linear output allows direct integration with any control system using industry standard interfaces.*




## Features


- Digital technology provides precise linear moisture measurement.
- The Averaging Mode provides a continuous “average” moisture over a batch.
- Averaging, “Bin Empty” and “High Moisture” Alarms and Signal Processing are performed internally by the sensor.
- The sensor is designed to suit the flow characteristics of the material.
- Link up to 16 sensors using an RS485 connection.
- Fully temperature compensated measurement.
- Fast response to changing conditions with 25 measurements per second.
- Remote communication with Hydro-Com software allows configuration of all sensor parameters including selection of sensor outputs, graphic traces of outputs, calibration of sensor readings and firmware upgrades.
- Consistent performance with no need for recalibration except for use with different materials.
- Tough and reliable with a proven track record.

## Angle of Sensor

Ensures continuous flow over the sensor



## Typical Installation

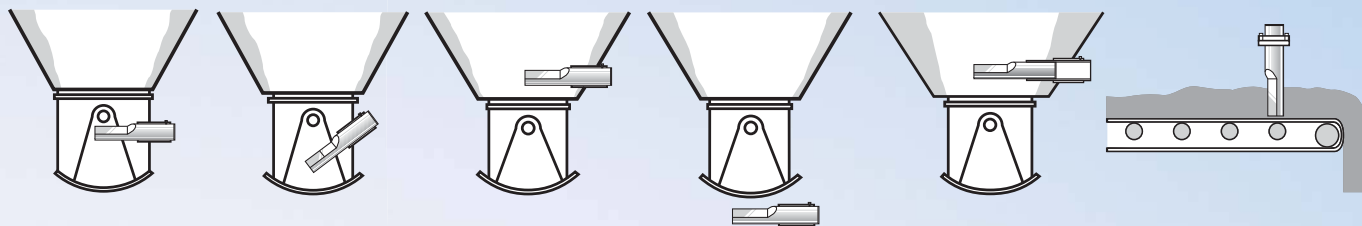

The Hydro-Probe II offers a choice of installation options to suit all bin types and conveyor applications. This ensures that the sensor measures the most representative sample of material.

## Connectivity

### Digital Connection

Up to 16 Hydro-Probe sensors may be daisy chained to connect directly to a control system via the RS485 serial communications link.



### Direct Connection to Control System or PC

The analogue or RS485 serial interface integrates easily with a control system or PC.



### Hydro-View Connection

The Hydro-Probe can be connected to a Hydro-View to provide a continuous moisture display. It also enables the sensor to be easily calibrated if calibration facilities are not available on a PC or control system.



## Networking

Network up to 16 sensors using one standard Ethernet connection with the Ethernet Adapter Kit. Power over Ethernet option also available.



## USB Interface

Easily communicate with the sensor using a USB Sensor Interface Module for sensor diagnostics, configuration and firmware upgrades.



# Technical Information

## Construction

Body: Stainless Steel

Faceplate: Ceramic

## Fixing

The sensor must be placed in the flow of material.

Bins and Silos: Install in the neck of a bin or underneath the gate. Standard and Extension Mounting Sleeves are available to suit different bin widths.

Conveyors: Secure in the flow of material.

## Moisture Range

The sensor will measure up to saturation of material.

## Penetration of Field

Approximately 75-100mm dependant upon material.

## Refresh Rate

25 times per second

## Operating Temperature

0-60° C. The sensor will not measure ice.

## Analogue Outputs

Configurable 0-20mA or 4-20mA current loop source. For 0-10V DC, 0-20mA should be selected and an external 500R load resistor connected across the analogue input terminals at the control system.

## Digital (Serial) Communication

Opto-Isolated RS485 2-wire port. RS232, Ethernet and USB interfaces available.

Communication protocol to access sensor values and parameters over an RS485 network is available on request.

## Discrete Inputs

The batch average, start, stop or moisture / temperature multiplexing functions can be controlled via the digital inputs.

## Extension Cable



Up to six twisted pairs, 22AWG, 0.35mm<sup>2</sup> conductors. Screen braid with 65% minimum coverage plus aluminium/polyester foil. Maximum cable run of 100m.

## Power Supply

+15V to +30V DC, 4W

## Configurable Alarms

The sensor can be set to signal "Bin Empty" or "Moisture Too High" levels.

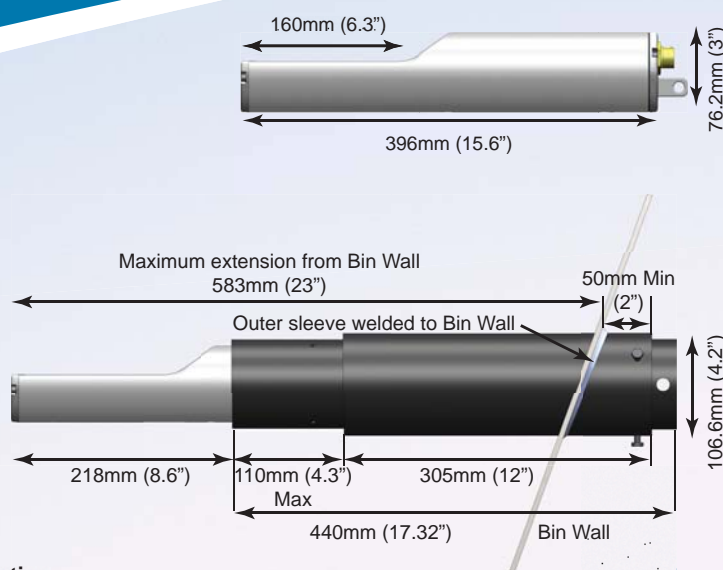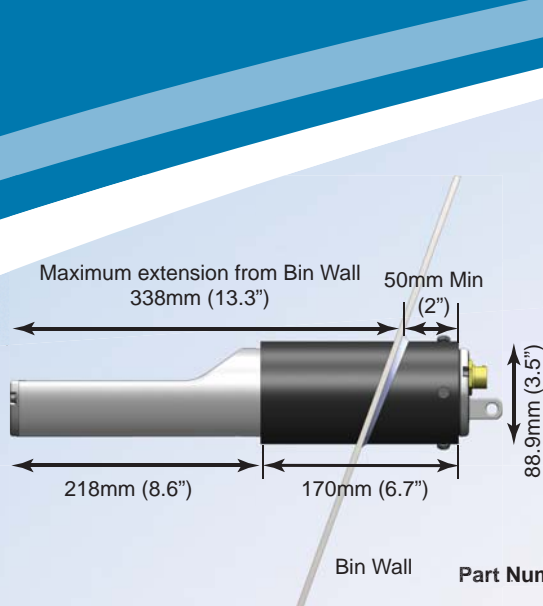

Bin Wall

## Part Number

## Description

HP02T

Hydro-Probe II - Standard Mode for normal digital or analogue connection

HP02C

Hydro-Probe II - Compatible with the Hydro-View Interface Unit

0025

Standard Mounting Sleeve

0026

Extension Mounting Sleeve

0975

4m Sensor Cable with military specification sensor connector

0069

4m Compatibility Cable, 4 core with Bulgin Connector

0067

Terminal Box (IP66, 10 Terminals)

0116

24VDC Power Supply 30 watt for up to 4 Sensors

0049A

RS232-485 Adapter DIN rail mounting

0049B

RS232-RS485 Converter, 9 pin D-type to Terminal Block

0009A

USB Sensor Interface Module including cables and power supply

EAK01

Ethernet Adapter Kit

EPK01

Ethernet Power Kit

P2EW

4 Year extended warranty option



# Hydronix

UK Office  
5 Caulside Drive, Antrim, BT41 2DU  
United Kingdom  
TEL: +44 (0) 28 9448 1800  
www.concretespares.co.uk

European Office  
Unit 6, Saint Anthony's Business Park, Ballymount Road, D22 1W9, A  
Ireland  
TEL: +353 (0) 1 4373653  
www.concretespares.ie