


Installation Instructions for Magnasafe - MS5, MS5-SS, MS7 & MS7-SS

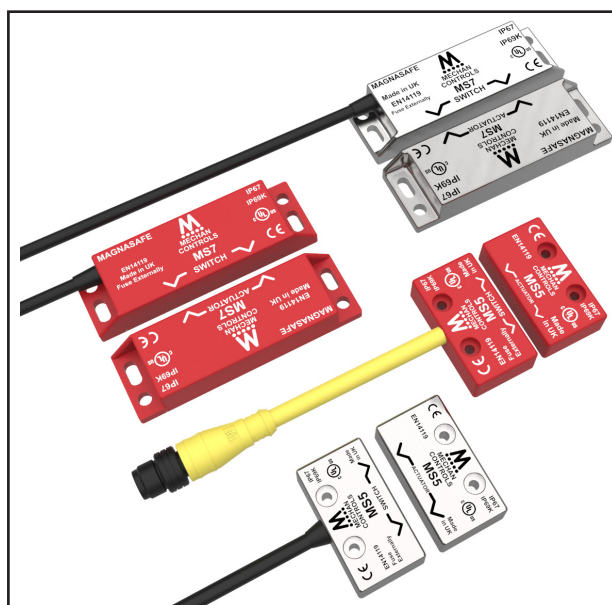

Description

MAGNASAFE MS5 and MS7 safety switches are non-contact, magnetically operated switch and actuator. Designed to work with safety relays that have a low inrush current on the switch input, these switches provides an economical method of switching for the higher category, dual channel circuits.

These safety switches are available in a robust ABS, or 316 Grade Stainless Steel housing, and both switch and actuator are fully sealed to IP67 & IP69K making them suitable for use in wet or dusty environments. They are easy to install and tolerant to misalignment. With correct installation, these safety switches comply with the guidelines given in EN14119.

Magnasafe safety switches are designed to be used in part of safety related control system. A risk assessment should take place to establish that the specifications of these safety switches are suitable for the application required. See Technical Specifications below or contact Mechan Controls for further information.

KEEP THIS GUIDE FOR FUTURE REFERENCE

The information is designed to help suitably qualified personnel install and operate Mechan Controls safety equipment. Before using this product, read this guide thoroughly along with any relevant European and/or National Standards E.g. Machinery Directive 2006/42/EC and its Amendments, Provision and Use of Work Equipment Regulations. Further information can be obtained from Mechan Controls Ltd.

| Technical Specifications | MS5, MS5-SS | MS7, MS7-SS |
|-----------------------------------|---------------------------------------------------|---------------------------------------------------|
| Contacts | 2 NO or 2 NO + 1 NC | 1 NO + 1NC, 2 NO + 1 NC or 3 NO |
| Safety Contact Rating | 24Vdc / 300mA | 24Vdc / 300mA |
| Safety Contact Switching | 7mm ON (Min) / 17mm OFF (Max) | 7mm ON (Min)/ 20mm OFF (Max) |
| Auxiliary Contact Rating | 24Vdc / 300mA | 24Vdc / 300mA |
| Auxiliary Contact Switching | 7mm OFF (Min) / 17mm ON (Max) | 7mm OFF (Min) / 20mm ON (Max) |
| Internal Fuse | - | - |
| External Fuse (Customer Supplied) | 0.2 Amps Fast Acting | 0.2 Amps Fast Acting |
| Construction | RED ABS, or 316 Grade Stainless Steel | RED ABS, or 316 Grade Stainless Steel |
| IP Rating | IP67 / IP69K | IP67 / IP69K |
| Operating Temperature | -25°C to +55°C (High Temp -25°C to +125°C) | -25°C to +55°C |
| Fixing | M4 Torx security screws (Tightening Torque 1.0NM) | M4 Torx security screws (Tightening Torque 1.0NM) |
| Connection | Pre-wired or M12 Quick Disconnect | Pre-wired or M12 Quick Disconnect |
| Vibration | 10 - 50Hz IEC 68-2-6 | 10 - 50Hz IEC 68-2-6 |
| Shock | 10g, 11ms IEC 68-2-27 | 10g, 11ms IEC 68-2-27 |

Safety Related Data

| | | | |
|-------------------|-------------------------------------------------------------------------------------------|------|---------------------------------|
| B10d | 2,000,000 | PFH | 6.52×10^{-8} |
| TM (Mission Time) | > 20 Years | PFHd | 4.3×10^{-8} See Note 1 |
| DC | 99% | SFF | 98% |
| MTTFd | High > 100 Years (Based on usage rate of 360 Days/Year, 24 Hours/Day, 10 Operations/Hour) | | |

Note 1: Based on dual channel wiring according to CAT 4. Diagnostic coverage provided by downstream control logic. DC - medium, MTTFd = 100 Years. Suitable for performance level applications PLe according to ISO 13849-1. (SIL 3 or SIL 2 according to IEC 62061)


| Safety Standards | |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Approvals | CE Complies with all relevant sections of the CE Marking Directive |
| | cUL 508 Industrial Control TUV Approved |
| International Directives | Machinery Directive 2006/42/EC, Low Voltage Directive 2014/35/EU, EMC Directive 2014/30/EU, RoHS Directive 2011/65/EU |
| International Standards | EN 12100 Safety of Machinery. General principles for design. |
| | EN ISO 14119 Safety of Machinery. Interlocking devices associated with guards. Principles for design and selection. |
| | EN ISO 13849 Safety of Machinery. Safety related parts of control systems. |
| | EN ISO 62061 Safety of Machinery. Functional safety of safety related electrical, electronic and programmable electronic control systems |
| | EN 60204 Safety of Machinery. Electrical equipment of machines. |
| | EN 60947-5-1 Low-voltage switchgear and controlgear. |
| | EN 60947-5-3 Low-voltage switchgear and controlgear. |

| Dimensions | |
|-------------------------------------------------------------------------|--|
| <div> <div> <div>MS5</div> </div> <div> <div>MS5-SS</div> </div> </div> | |
| <div> <div> <div>MS7</div> </div> <div> <div>MS7-SS</div> </div> </div> | |


| Mounting | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <p>Do not use safety switches as a stop. 1 mm separation when closed provides the best results.</p> <p>Mount the switch on to the machine frame and the actuator on to the opening edge of the door.</p> <p>Always try to mount the switch on non-ferrous material. (Ferrous materials may reduce the switching distance.)</p> <p>EN14119: Hide the actuator where possible.</p> <p>NOTES:</p> <p>Minimum separation 50mm between adjacent switches</p> <p>DO NOT mount on hinged side of the guard.</p> | |

PRE-WIRED


MS7-11




MS5-21 & MS5-SS-21
MS7-21 & MS7-SS-21



MS7-30
MS7-SS-30




MS5-20
MS7-20




PRE-WIRED HIGH TEMPERATURE

MS5-SS-11-dc-xxHT




MS5-SS-21-dc-xxHT



LEADED QUICK DISCONNECT

MS5-20-DC-LQD


Connector Contact Cable



Connector
Micro DC M12


MS5-21-DC-LQD
MS5-SS-DC-21-LQD
MS7-21-DC-LQD
MS7-SS-21-DC-LQD

Connector Contact Cable




Connector
Micro AC 1/2" - 20

LEADED QUICK DISCONNECT OPTION LQD 150mm Cable with M12 Connector

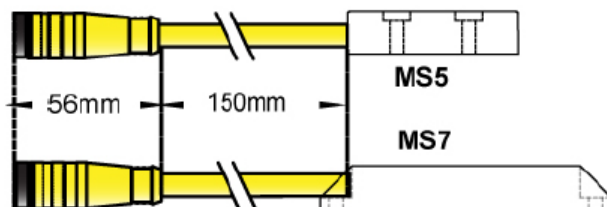

Operation


The MS5 & MS7 safety switches and actuators are designed to approach each other from most angles. When the guard is closed the targets on the printed face of the switch and actuator must be aligned.

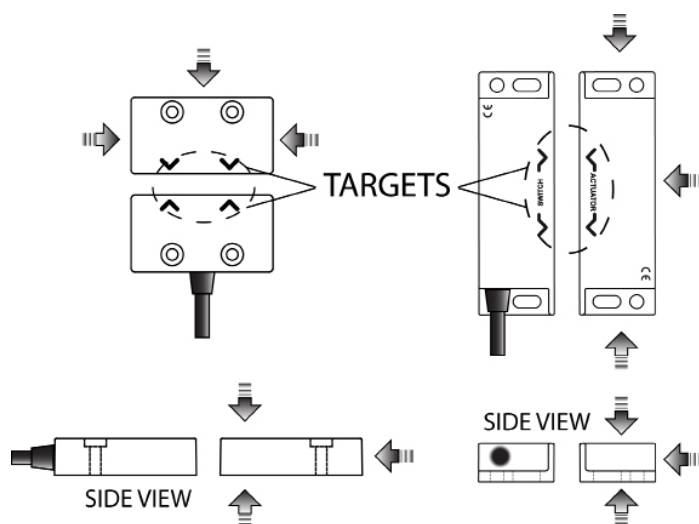


Installation Instructions for Magnasafe - MS5, MS5-SS, MS7 & MS7-SS

Switching Characteristics

The chart shows the switching points in millimetres

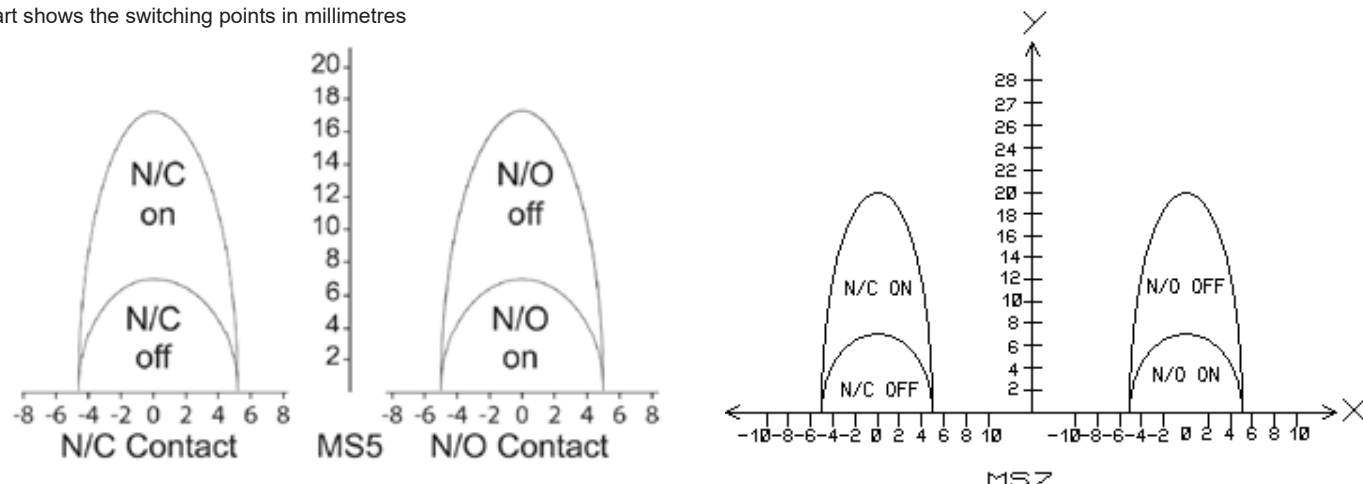

Recommend Safety Control Unit

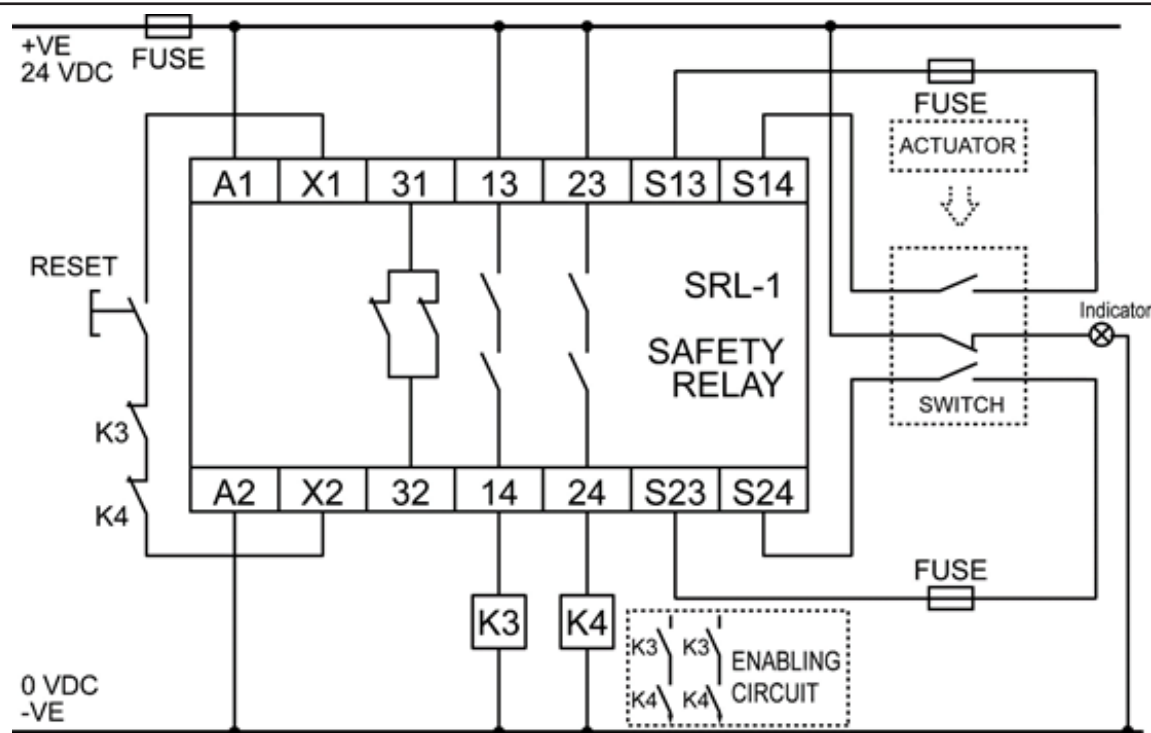

IMPORTANT

All control contacts should be externally fused.

Recommended Safety Control Unit Mechan Part Number: SRL-1 24VAC/DC or EM1 & ESM

Maintenance

It is recommended to check the safe operation of the switches and look for signs of damage or excessive wear on a weekly basis. Damaged units should be replaced or returned to the manufacturer for repair where practical.

Notes

In the interest of product development specifications are subject to change without notice. It is the responsibility of the user to ensure compliance with any acts or by-laws in place. All information regarding Mechan equipment is believed to be accurate at the time of printing. Responsibility cannot be accepted for errors or omissions.