


EPDM/ NATURAL 2-tone rubber

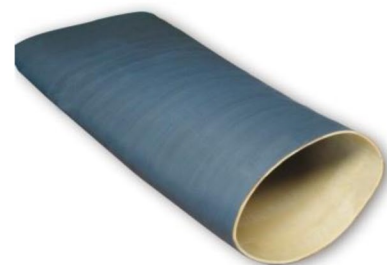

CONSTRUCTION: abrasion resistant 2 tone natural rubber light brown inside, black EPDM outside.

APPLICATION: discharge of abrasive materials, such as sand, gravel, cement, grain and powder without pressure. The black cover is particularly resistant to weather, ozone and UV rays.

SURFACE: smooth with fabric impression.



KONSTRUKTION: hoch abriebfest, naturgummi, beige 2 farben unterschichtus naturgummi desckschicht aus gummi schwarzer farbe.

ANWENDUNG: zur drucklosen beförderung von abrasiven medien wie sand, kies, trockenem zement usw. die schwarze abdeckung ist besonders beständig gegen witterungseinflüsse, ozon und UV-strahlen.

OBERFLÄCHE: stoffimpression.



CONSTRUCCIÓN: caucho natural de dos colores, interior de caucho natural y externo de caucho de color negro. resistente a la abrasión. La cobertura negra es particularmente resistente a los agentes atmosféricos, al ozono y a rayos UV.

USO: descarga sin presión de materiales abrasivos: arena, grava, y polvo.

SUPERFICIE: con impresión de tela.



CONSTRUCTION: caoutchouc naturel resistant a l'abrasion. deux couleurs, sous couche en caoutchouc naturel. couverture en caoutchouc de couleur noir.

APPLICATION: refoulement sans pression des matieres abrasives, comme le sable, gravier, ciment, cereales et poudres. la couverture noire est particulierement resistente aux agents atmosferiques, ozon et rayons UV.

SURFACE: impression textile

TEMPERATURE, TEMPERATUR, TEMPERATURA, TEMPERATURE: -40°C / +70°C -40°F / +158°F

NORMS, NORMEN. NORMAS, NORMES: ISO 1307

			
mm	mm	mt	kg/mt
50x58	4	12	0,75
60x68	4	12	0,88
70x78	4	12	1,02
76x84	4	12	1,07
80x88	4	12	1,16
90x98	4	12	1,27
102x110	4	12	1,44
114 x122	4	12	1,60
120x128	4	12	1,68
130x138	4	12	1,83
140x148	4	12	1,95
152x160	4	12	2,11
168x176	4	12	2,32
193x201	4	9	2,68
200x208	4	12	2,76
220x228	4	6	3,03
254x262	4	12	3,50
273x281	4	10	3,74
305x313	4	12	4,20
323x331	4	6	4,42
350x358	4	6	4,81
400x408	4	7	5,52
500x508	4	6	6,81
612x620	4	6	8,50