


ADVANCED DIAGNOSTIC LOAD CELL TESTER

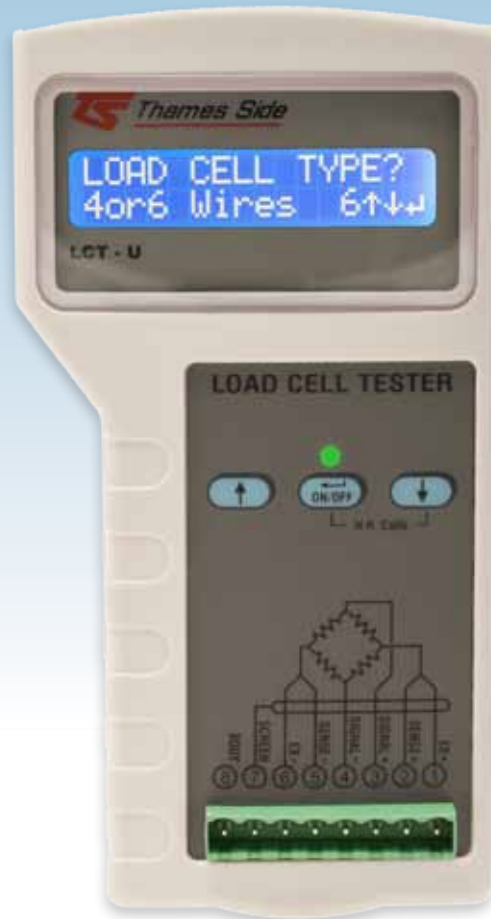

The advanced Load Cell Tester Model LCT-U is a stand-alone hand-held device specially designed for fast, comprehensive troubleshooting of strain gauge load cells. The LCT-U can quickly diagnose problems with all common types of load cell available today, including 6-wire load cells (with sense wires).

The LCT-U provides the operator with all the essential data about the load-cell being tested, including the bridge resistance and integrity, physical distortion (possibly caused by overload, shock load or metal fatigue) and insulation resistance (which can highlight moisture or chemical ingress).

- Fast, accurate testing of load cells and scales – full test complete within 5 seconds
- Very user friendly – pin assignment is printed on front of tester
- Coloured LEDs highlight suspicious readings
- Can check alignment of multiple load cell scales
- Operated by standard batteries for portability
- Continuous signal reading allows for checking of linearity and repeatability
- Can check for physical distortion of a load cell
- Works with 4-wire or 6-wire load cells
- Rugged ABS enclosure and rubber cover
- Lightweight
- Ideal tool for installation/commissioning engineers

LCT-U

technical specification...



LCT-U Advanced Load Cell Tester

Specifications	
Bridge testing voltage	1.25 VDC
High resistance testing voltage	10 VDC
A/D resolution	16 bit
Bridge input and output resistance	Up to 5k Ω at 0.5 Ω resolution
Sense resistance (for 6 wire load cells)	Up to 500 Ω at 0.1 Ω resolution
Resistance accuracy	$\pm 1 \Omega$
Insulation resistance	Maximum > 5 G Ω ; Minimum <10 M Ω
High resistance accuracy	10%
Load cell output in percentage of full scale (input resistance > 175 Ω)	$\pm 250\%$ at 0.01% resolution and 0.1% accuracy
Gain adjustment	0.1 to 5 mv/V (in steps of 0.01)

Additional Data	
Connector	8-pin with screw terminals (supplied with the unit)
Power source	4 x Type AA batteries (not supplied)
Display	Alphanumeric: 16 characters, 2 lines
Size	150 mm x 80 mm x 28 mm
Weight	250 grams

For further information, including a video user guide, please visit our website www.thames-side.com

DISTRIBUTED BY: PNEUTROL INTERNATIONAL LIMITED

sales@pneutrol.com

UK OFFICE:

5 CAULSIDE DRIVE, ANTRIM, NORTHERN IRELAND, BT41 2DU

TEL: 44 (0) 28 9448 1800, www.concretespares.co.uk

ROI OFFICE:

UNIT 6, ST ANTHONY'S BUSINESS PARK DUBLIN, D22 VW95

TEL: 353 (1) 437 3653, www.concretespares.ie

Issue: LCT-U.12.13



Our policy is one of continuous product enhancement. We therefore reserve the right to incorporate technical modifications without prior notification.