


PT platform scales offer durability and quality construction for a variety of different applications. The PT features a large steel base with a chequered plate surface and armoured cable. Optional ramps facilitate loading and unloading heavy objects. The platforms are available with or without indicators. Adam offers a range of indicators that pair with the platform, including the GK, GC, AE 403, AE 503 and AE 504.

Quality construction with chequered-plate surface for ultimate durability and performance



Approved for trade

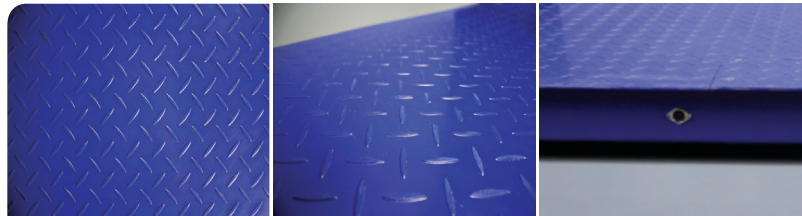

Features

- Models shown with and without indicators for indicator spec refer to indicator pages
- Rugged construction stands up to industrial use
- Chequered plate surface for added grip
- Optional ramps facilitate loading and unloading
- Can be used with any Adam indicators
- Approximately five-meter/15-foot shielded cable

Applications

- Weighing
- Parts counting
- Checkweighing
- Dynamic / animal weighing

Compatible Indicators



AE 403 Indicator



GK Indicator



GC Indicator



AE 503 Indicator



AE 504 Indicator

PNEUTROL INTERNATIONAL LIMITED

sales@pneutrol.com

About ADAM:


For nearly 50 years, professionals worldwide have relied on Adam Equipment for an extensive selection of dependable and affordable weighing equipment. Adam provides the right balance of speed, performance and value.

| Model | PT 110 | PT 112 | PT 115 | PT 310 | PT 312 | PT 315 | PT 110M | PT 112M | PT 115M | PT 310M | PT 312M | PT 315M |
|----------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Capacity | 1000kg | | | 3000kg | | | 1500kg | | | 3000kg | | |
| Readability | 0.2kg | | | 0.5kg | | | 0.5kg | | | 1kg | | |
| Loadcell [Excitation Voltage] | 5 - 10 VAC / DC | | | | | | | | | | | |
| Loadcells [num] | 4 | | | | | | | | | | | |
| Pan Size | 1000x 1000mm | 1200x 1200mm | 1500x 1500mm | 1000x 1000mm | 1200x 1200mm | 1500x 1500mm | 1000x 1000mm | 1200x 1200mm | 1500x 1500mm | 1000x 1000mm | 1200x 1200mm | 1500x 1500mm |
| Stabilisation Time (sec) | 2 | | | | | | | | | | | |
| Operating Temperature | -10° to 40°C | | | | | | | | | | | |
| Housing | Mild steel base | | | | | | | | | | | |
| Cable Length | 3M | | | | | | | | | | | |
| Overall Dim. | 1000x1000x- 110mm (wxdxh) | 1200x1200x- 110mm (wxdxh) | 1500x1500x- 110mm (wxdxh) | 1000x1000x- 110mm (wxdxh) | 1200x1200x- 110mm (wxdxh) | 1500x1500x- 110mm (wxdxh) | 1000x1000x- 110mm (wxdxh) | 1200x1200x- 110mm (wxdxh) | 1500x1500x- 110mm (wxdxh) | 1000x1000x- 110mm (wxdxh) | 1200x1200x- 110mm (wxdxh) | 1500x1500x- 110mm (wxdxh) |
| Net Weight | 89kg | 105kg | 159kg | 89kg | 105kg | 159kg | 89kg | 105kg | 159kg | 89kg | 105kg | 159kg |
| Approvals | N/A | | | | | | EC type approved | | | | | |

Accessories

| Item number | Description |
|-----------------|--------------------------------------|
| 700100200 | Mild Steel Ramp - PT 12R 1200mm wide |
| 700100201..... | Mild Steel Ramp - PT 15R 1500mm wide |
| 700100199..... | Mild Steel Ramp - PT 10R 1000mm wide |

Key Accessories



Mild Steel Ramp

Compatible with several Adam indicators, the PT is designed to weigh pallets, crates and large containers. PT contains an innovative X frame beneath the platform, which reinforces and strengthens the platform for improved support.