

EXTRAFLEX REINFORCED PVC WATER HOSE

GHY Series



Extraflex is perhaps the most versatile hose available today with its unique low temperature characteristics and outstanding flexibility in any climatic condition.

This abrasion resistant hose is reinforced with high tensile polyester cord and the first choice of the Professional in any market sector. Extraflex is already a familiar sight in demanding applications throughout Europe. Look for the distinctive yellow colour and brand mark on every coil.

The above specification far exceeds the requirements of British Standard BS 3746 for water hoses.

Key Features:

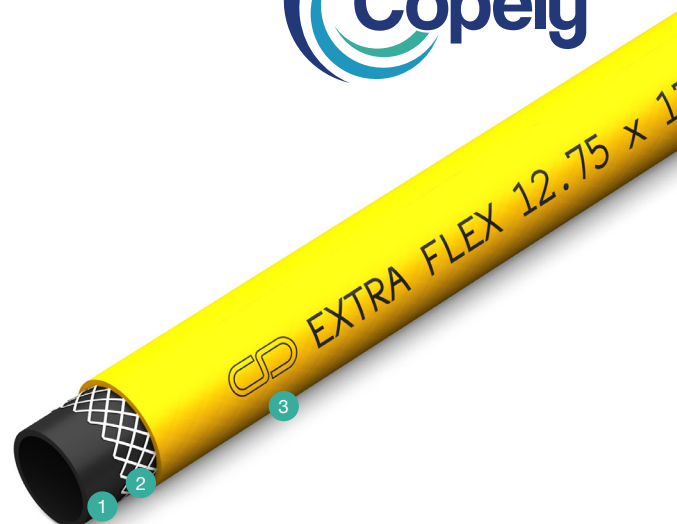
- High flexibility.
- Silicone free.
- Abrasion resistance - good.
- Made from Cadmium free materials.
- Kink resistance - good.
- Outstanding all year round flexibility.
- Polyester fibre reinforcement.
- Premium quality inner.
- Exceeds BS3746 : 1990.

Sizes:

Available in 25m and 50m coils
12.5mm, 19mm & 25mm ID

Colours:

Yellow with black inner








1. DEHP free PVC inner
2. Polyester fiber reinforcement
3. DEHP free PVC outer



Applications:

- Watering
- Agriculture - Irrigation
- Industrial use
- Horticulture

					
Product Ref	Internal Diameter	External Diameter	Minimum Working Pressure	Minimum Burst Pressure	Weight per Metre
GHY12	12.5mm	17.5mm	10 Bar	30 Bar	0.144 Kg
GHY19	19.25mm	25.5mm	8 Bar	24 Bar	0.298 Kg
GHY25	25mm	32.5mm	6 Bar	18 Bar	0.440 Kg

PNEUTROL INTERNATIONAL LIMITED
sales@pneutrol.com

UK OFFICE:
5 CAULSIDE DRIVE, ANTRIM, NORTHERN IRELAND, BT41 2DU
TEL: + 44 (0) 28 9448 1800, www.concretespares.co.uk

ROI OFFICE:
UNIT 6, ST ANTHONY'S BUSINESS PARK DUBLIN, D22 VW95,
TEL: +353 (1) 437 3653, www.concretespares.ie